

RADIAL


R404510000

TECHNICAL DATA SHEET

TITLE: 6 W 8GHz BNC/m COAXIAL TERMINATION

LTR. B

DRAWING

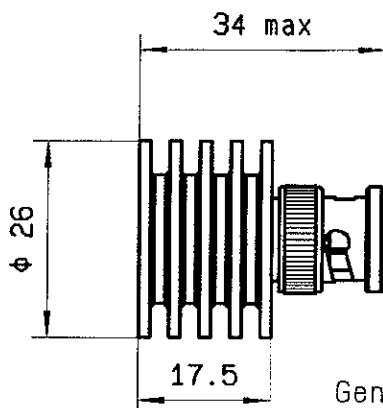

General tolerances: +/- 0.5 mm

ELECTRICAL CHARACTERISTICS


FREQUENCY RANGE	: DC - 8GHz
IMPEDANCE	: 50 Ohms
DC RESISTANCE	: 50 Ohms ± 5 %
AVERAGE POWER HANDLING	: 6 W at 75°C
PEAK POWER HANDLING	: 4 kW (1 µs, 1%.) at 25°C
V.S.W.R :	DC - 2 GHz : <= 1.10
	2 - 4 GHz : <= 1.15
	4 - 8 GHz : <= 1.25

MECHANICAL CHARACTERISTICS

CONNECTOR	: BNC male per MIL C 39012
MAXIMUM WEIGHT	: 26 grams

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C)	: -55 , +125
STORAGE TEMPERATURE RANGE (°C)	: -55 , +125

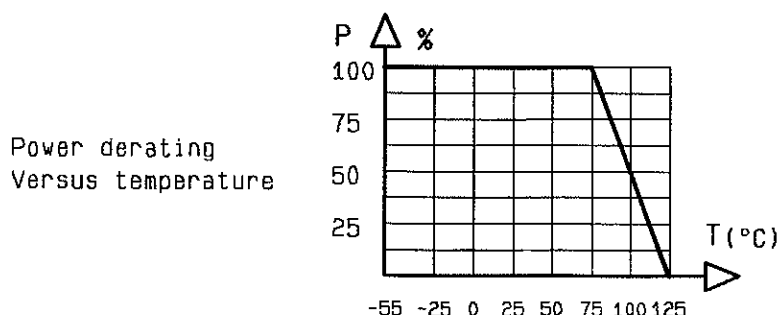

PEN
CAT

QUALITY Dpt App.

MO
S

B
A1

New format

New format

22.10.92

20.03.89

PG

KL

PAGE
1/1

DATE
25.11.83

NAME
DP

LTR

REVISIONS

DATE

APP.